


FEATURES

The camera is designed for automotive rearview system to provide the driver with a view of the rear vehicle.

- You can use the camera by a DC 12V/200mA.
- Miniature size and suspended design for more convenient installation.
- Waterproof & dust resistance.
- Operates over a wide temperature range.

INSTALLATION

1. Fasten the camera bracket on the vehicle firmly.
2. Install the camera.
3. Installation finished.
4. Attach the camera cable to the extension cable.
5. Seal with supplied silicon tape to ensure waterproof. Run extension cable inside vehicle.

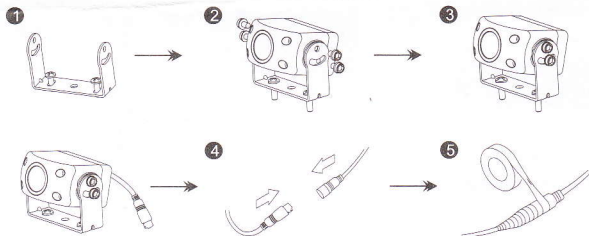

CLEANING AND CARING

Caution!

Do not use sharp or hard objects to clean the device as these may damage the device.

- ◇ Clean the camera with a soft, damp cloth from time to time.

CHECKING AND SETTING

- ◇ Check the function of the camera after you have connected it to a monitor.
- ◇ Align the camera using the image on the monitor to help you:
The monitor image should show the rear or the bumper of the vehicle at the bottom edge of the screen. The middle of the bumper should be in the middle of the screen.
- ◇ Tighten the six fastening screws of the camera bracket.

Settings for contrast and brightness can be made on the monitor.

SPECIFICATIONS

Image type	Color sony CCD
Resolution (pixels)	PAL: 500 (H) x 582 (V) NTSC: 510 (H) x 492 (V)
Image size	1/4 inch
Lens	2.1mm, F2.5
Lens angle	150°
Synchronization	Internal
Horizontal resolution	420 TV Lines
Power supply	DC 12V ± 10%
Power consumption	≤ 1.2W
Signal to noise ratio	≥ 48dB
Operating temperature range	-30°C to +70°C
Storage temperature range	-40°C to +80°C
Dimension	46 (L) x 37 (H) x 36 (D) mm
Weight	107g